

Driven The World Over®



DOUBLE COIN TYRE GROUP LTD.

All Steel Radial Earthmover Tyres & Industrial Tyres





Introduction

Double coin tyre group Ltd. is a famous tyre manufacture enterprise, with two famous brands of "Double Coin" and "Warrior". With its strong force on technological research and development, the company possesses a state-level technical center. The company's product is stable and reliable in quality and comparatively complete in specifications and types. The company sells its products to over 100 countries and regions and it also provides auxiliary products to over 30 domestic famous automobile manufactures. Double Coin is a professional tyre manufacturer with the longest tyre-making history in China. It boasts the most famous Double Coin and Warrior brand in the industrial history of Chinese tyre. Double Coin was the first company certified by the US Department of Transportation (DOT), the Economic Center of Europe (ECE) and the INMETRO of Brazil.

Devoted to becoming one of the most professional suppliers of tire products and services.

Driven The World Over®



CONTENTS

Earthmover Tyres Instruction

The Instruction of Earthmover Tyres.....	04
Tread Depth Design Instruction.....	04
Sidewall Marks Instruction.....	05
The Pattern Classifications and Service Conditions.....	06
Speed Symbol.....	06
Load Index and Maximum Load Relationship.....	07

Earthmover Tyres

REM-1.....	06
REM-2.....	06
REM-15.....	07
REM-10.....	07
REM-8.....	07
REM-18.....	07
REM-12.....	07
REM-19.....	07
REM-7.....	
REM-9.....	
REM-28S.....	
REM-21.....	

Giant OTR Tyres

REM-9.....	06
REM-11.....	06
REM-19.....	
REM-11.....	

Industrial Tyres

REM-3.....	06
REM-6.....	06
REM-17.....	
REM-26.....	

Technical Data

Earthmover Tyres.....	06
Giant OTR Tyres.....	06
Industrial Tyres.....	06

Earthmover Tyres Instruction



Double Coin Holdings Ltd. is one listed company which publishing both stock A and stock B , majority-owned by Shanghai Huayi (Group) Company. The company is a famous tyre manufacture enterprise, with two famous brands of “Double Coin” and “Warrior”. With its strong force on technological research and development, the company possesses a state-level technical center. The company’s product is stable and reliable in quality and comparatively complete in specifications and types. The company sells its products to over 100 countries and regions and it also



Driven The World Over®



Earthmover

Regular

24.00R35 ★★

Section Width (inches)	Radial Structure	Rim Diameter (Inchs)	Star Rating
24.00	R	35	★★

Wide Base

23.5R25 ★★

Section Width (inches)	Radial Structure	Rim Diameter (Inchs)	Star Rating
23.5	R	25	★★

Super Wide Base




35/65R33 ★★

Section Width (inches)	Aspect Ratio 65 Series	Radial Structure	Rim Diameter (Inchs)	Star Rating
35	65	R	33	★★



385/95R24

Load Index	Speed Symbol	Section Width (Inchs)	Aspect Ratio 65 Series	Rim Diameter (Inchs)
170	E	385	95	24

Tyre Aspect Ratio




Tread Depth Design Instruction



Sidewall Marks Instruction

- 1. DOUBLE COIN: BRAND NAME
- 2. 18.00R33: Tyre Size
- 3. E4: TRA Code
- 4. ★★: Star Rating
- 5. REM9: Tread Pattern
- 6. Specifications Code

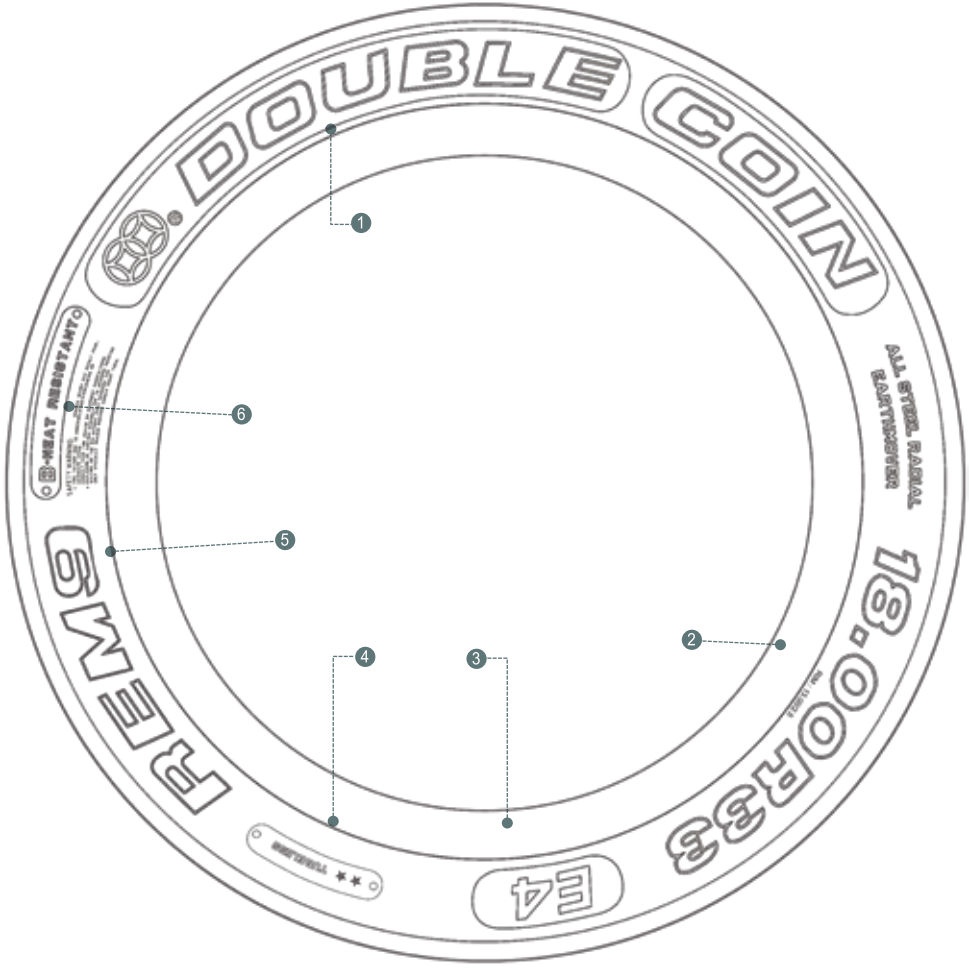

Tread Compound Instruction

- A. Cut Resistant
- B. Heat Resistant
- S. Standard

The Pattern Classifications and Service Conditions

	PATTERN NO	PATTERN FORM	SERVICE TYPE	MAXIMUM SPEED	HIGHEST SINGLE MILEAGE
C-ROAD ROLLER TYRE	C-1	Smooth	Road Roller	10 KM/H	Unlimited
	C-2	Groove	Road Roller	10 KM/H	Unlimited
E-SCRAPER AND DUMPER TYRE	E-1	Regular Stripe	Handling	65 KM/H	4 KM
	E-2	Regular Traction	Handling	65 KM/H	4 KM
	E-3	Regular Block	Handling	65 KM/H	4 KM
	E-4	Deepened Block	Handling	65 KM/H	4 KM
	E-7	Buoyancy	Handling	65 KM/H	4 KM
G-GRADER TYER	G-1	Regular Stripe	Flat	40 KM/H	Unlimited
	G-2	Regular Traction	Flat	40 KM/H	Unlimited
	G-3	Regular Block	Flat	40 KM/H	Unlimited
	G-4	Deepened Block	Flat	40 KM/H	Unlimited
LOADER AND EARTHMOVER TYRE	L-2	Regular Traction	Loading Bulldozing	10 KM/H	75 KM
	L-3	Regular Block	Loading Bulldozing	10 KM/H	75 KM
	L-4	Deepened Block	Loading Bulldozing	10 KM/H	75 KM
	L-5	Extra Deepened Block	Loading Bulldozing	10 KM/H	75 KM
	L-3S	Regular Smooth	Loading Bulldozing	10 KM/H	75 KM
	L-4S	Thickened Smooth	Loading Bulldozing	10 KM/H	75 KM
IND-INDUSTRIAL TYRE	L-5S	Extra Thick Smooth	Loading Bulldozing	10 KM/H	75 KM
	IND-3	Regular Pattern		30 KM/H	Unlimited
	IND-4	Deepened Pattern		30 KM/H	Unlimited
	IND-5	Extra Deepened Pattern		30 KM/H	Unlimited

Speed Symbol

SYMBOL	A2	A6	A8	B	C	D	E	F	G
KM/H	10	30	40	50	60	65	70	80	90
MPH	6	20	25	30	35	40	45	50	55



Load Index and Maximum Load Relationship

LOAD INDEX	SINGLE MAX LOAD		LOAD INDEX	SINGLE MAX LOAD		LOAD INDEX	SINGLE MAX LOAD		LOAD INDEX	SINGLE MAX LOAD	
	KG	IB		KG	IB		KG	IB		KG	IB
120	1400	3090	160	4500	9920	200	14000	30870	240	45000	99210
121	1450	3200	161	4625	10200	201	14500	31970	241	46250	101960
122	1500	3310	162	4750	10470	202	15000	33070	242	47500	104720
123	1550	3420	163	4875	10750	203	15500	34180	243	48750	107470
124	1600	3530	164	5000	11020	204	16000	35280	244	50000	110250
125	1650	3640	165	5150	11350	205	16500	36380	245	51500	113540
126	1700	3750	166	5300	11690	206	17000	37480	246	53000	117950
127	1750	3860	167	5450	12020	207	17500	38590	247	54500	120150
128	1800	3970	168	5600	12350	208	18000	39690	248	56000	123480
129	1850	4080	169	5800	12790	209	18500	40790	249	58000	127890
130	1900	4190	170	6000	13230	210	19000	41890	250	60000	132300
131	1950	4300	171	6150	13560	211	19500	43000	251	61500	135580
132	2000	4410	172	6300	13890	212	20000	44100	252	63000	138890
133	2060	4540	173	6500	14330	213	20600	45420	253	65000	143300
134	2120	4670	174	6700	14770	214	21200	46750	254	67000	147710
135	2180	4810	175	6900	15210	215	21800	48070	255	69000	152120
136	2240	4940	176	7100	15650	216	22400	49390	256	71000	156530
137	2300	5070	177	7300	16090	217	23000	50700	257	73000	160930
138	2360	5200	178	7500	16530	218	23600	52040	258	75000	165340
139	2430	5360	179	7750	17090	219	24300	53580	259	77500	170660
140	2500	5510	180	8000	17640	220	25000	55120	260	80000	176400
141	2575	5680	181	8250	18190	221	25750	56780	261	82500	181880
142	2650	5840	182	8500	18740	222	26500	58430	262	85000	187390
143	2725	6010	183	8750	19290	223	27250	60070	263	87500	192900
144	2800	6170	184	9000	19840	224	28000	61740	264	90000	198450
145	2900	6390	185	9250	20390	225	29000	63940	265	92500	203920
146	3000	6610	186	9500	20940	226	30000	66150	266	95000	209440
147	3075	6780	187	9750	21500	227	30750	67790	267	97500	214950
148	3150	6950	188	10000	22050	228	31500	69460	268	100000	220500
149	3250	7170	189	10300	22710	229	32500	71660	269	103000	227370
150	3350	7390	190	10600	23370	230	33500	73870			
151	3450	7610	191	10900	24030	231	34500	76070			
152	3550	7830	192	11200	24690	232	35500	78280			
153	3650	8050	193	11500	25360	233	36500	80480			
154	3750	8270	194	11800	26020	234	37500	82690			
155	3875	8540	195	12150	26790	235	38750	85430			
156	4000	8820	196	12500	27560	236	40000	88200			
157	4125	9090	197	12850	28330	237	41250	90940			
158	4250	9370	198	13200	29100	238	42500	93710			
159	4375	9650	199	13600	29990	239	43750	96470			

Earthmover Tyres



Driven The World Over®
 **DOUBLECOIN**®



REM-1

REM-1

FEATURES AND BENEFITS:



(G2/L2)
GRADER

- All-purpose tread design to provide exceptional traction and even wear.
- Wide footprint offers excellent flotation and smooth ride.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
13.00R24	★	40KM/H	1296	352	30	8.00TG	146	3000kg/375kpa	G2/L2
14.00R24	★	40KM/H	1365	385	30	8.00TG	153	3650kg/375kpa	G2/L2



REM-2

REM-2



(E3/L3)
EARTHMOVER
LOADER

- Enhanced self-cleaning design for all purpose applications.
- Multi-function, non-directional tread design for optimum usage on equipment.
- Superior traction in sand, stone, mud and other surfaces.
- OEM Certified.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
17.5R25	★	50KM/H	1340	448	27	14.00/1.5	157	4125kg/350kpa	E3/L3
		10KM/H	1340	448	27	14.00/1.5	176	7100kg/450kpa	
17.5R25	★★	50KM/H	1480	527	31	17.00/2.0	168	5600kg/350kpa	E3/L3
		10KM/H	1480	527	31	17.00/2.0	186	9500kg/450kpa	
20.5R25	★	50KM/H	1617	600	36	19.5/2.5	176	7100kg/350kpa	E3/L3
		10KM/H	1617	600	36	19.5/2.5	195	12150kg/450kpa	
20.5R25	★★	50KM/H	1748	695	37.5	22.00/3.0	184	9000kg/350kpa	E3/L3
		10KM/H	1748	695	37.5	22.00/3.0	202	15000kg/450kpa	
23.5R25	★	50KM/H	1340	448	27	14.00/1.5	167	5450kg/450kpa	E3/L3
		10KM/H	1340	448	27	14.00/1.5	182	8500kg/575kpa	
23.5R25	★★	50KM/H	1480	527	31	17.00/2.0	177	7300kg/450kpa	E3/L3
		10KM/H	1480	527	31	17.00/2.0	193	11500kg/575kpa	
26.5R25	★	50KM/H	1617	600	36	19.50/2.5	185	9250kg/450kpa	E3/L3
		10KM/H	1617	600	36	19.50/2.5	201	14500kg/575kpa	
26.5R25	★★	50KM/H	1748	695	37.5	22.00/3.0	193	11500kg/450kpa	E3/L3
		10KM/H	1748	695	37.5	22.00/3.0	209	18500kg/575kpa	
29.5R25	★★	50KM/H	1860	748	40	25.00/3.5	200	14000kg/450kpa	E3/L3
		10KM/H	1860	748	40	25.00/3.5	216	22400kg/575kpa	



REM-15

REM-15

FEATURES AND BENEFITS:



(E3/L3)
EARTHMOVER
LOADER

- Tread design to provide good traction and grip.
- Open pattern design is suitable for soft ground.
- Wide footprint improves the tyre abrasion resistant performance.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
17.5R25	★	10KM/H	1340	458	29	14.00/1.5	176	7100kg/450kpa	L2
	★★	10KM/H	1340	458	29	14.00/1.5	182	8500kg/575kpa	L2



REM-10

REM-10

FEATURES AND BENEFITS:



(E3+/L3+)
HAULAGE
ARTICULATED

- Multi-function, non-directional tread design for optimum usage on equipment.
- Superior traction in sand, stone, mud and other surfaces enhanced smooth ride and even wear.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
26.5R25	★★	50KM/H	1754	695	40.5	22.00/3.0	193	11500kg/450kpa	E3/L3
	★★	10KM/H	1754	695	40.5	22.00/3.0	209	18500kg/575kpa	E3/L3
29.5R25	★★	50KM/H	1868	748	44	25.00/3.5	200	14000kg/450kpa	E3/L3
	★★	10KM/H	1868	748	44	25.00/3.5	216	22400kg/575kpa	E3/L3



REM-8

REM-8

FEATURES AND BENEFITS:



(MCS)
HIGH SPEED CRANE

- High speed mobile crane tire designed for both on & off highway applications.
- New generation tread pattern increases traction while minimizing fuel consumption.
- DOT approved for on highway use.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
14.00R24	★★★	70KM/H	1364	396	25	10.00W	170	6340kg/1000kPa	E2
14.00R25	★★★	70KM/H	1364	396	25	10.00/1.5	170	6340kg/1000kPa	E2
385/95R25	★★	80KM/H	1364	396	25	10.00/1.5	170	6000kg/900kPa	E2
385/95R25	/	90KM/H	1364	396	25	10.00/1.5	170	6000kg/900kPa	E2
16.00R25	★★★	70KM/H	1488	432	26	11.25/2.0	177	7400kg/900kPa	E2
16.00R25	★★	80KM/H	1488	432	26	11.25/2.0	174	6700kg/900kPa	E2
20.5R25	★★	70KM/H	1490	540	31	17.00/2.0	179	7757kg/703kPa	E2



REM-18

REM-18

FEATURES AND BENEFITS:



(L5)
LOADER

- Extra deep open pattern provides excellent traction.
- Excellent puncture resistance and cut resistant performance.
- Reinforced carcass ensures longer using life.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
35/65R33	★	10KM/H	2056	934	98	28.00/3.5	217	23000kg/500kPa	L5
	★★	10KM/H	2056	934	98	28.00/3.5	223	27250kg/650kPa	L5



REM-12

REM-12

FEATURES AND BENEFITS:



(L5)
MINING LOADER

- Extra deep tread provides excellent traction.
- Good puncture resistance and cut resistant performance.
- Reinforced shoulder design can adapt harsh operation condition.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
17.5R25	★	6KM/H	1400	470	66.5	14.00/1.5	174	6600kg/450kPa	L5
	★★	6KM/H	1400	470	66.5	14.00/1.5	182	8500kg/575kPa	
26.5R25	★	10KM/H	1800	690	92	22.00/3.0	202	15000kg/450kpa	L5
	★★	10KM/H	1800	690	92	22.00/3.0	209	18500kg/575kpa	
29.5R25	★	10KM/H	1905	775	100	25.00/3.5	208	18000kg/450kpa	L5
	★★	10KM/H	1905	775	100	25.00/3.5	216	22400kg/575kpa	



REM-19

REM-19

FEATURES AND BENEFITS:



(L5)
LOADER

- Non-directional tread pattern with center rib provides enhanced traction
- Wide footprint for stability; center riding rib for ride comfort
- Special cut/chip resistance compounds extend tyre life and promote retreadability

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
20.5R25	★	10KM/H	1530	536	72	17.00/2.0	186	9500kg/450kpa	L5
	★★	10KM/H					193	11500kg/575kpa	
23.5R25	★	10KM/H	1662	612	78	19.50/2.5	195	12150kg/450kpa	L5
	★★	10KM/H					201	14500kg/575kpa	
26.5R25	★	10KM/H	1800	690	92	22.00/3.0	202	15000kg/450kpa	L5
	★★	10KM/H					209	18500kg/575kpa	L5
29.5R25	★	10KM/H	1905	775	100	25.00/3.5	208	18000kg/450kpa	L5
	★★	10KM/H					216	22400kg/575kpa	L5



REM-7

REM-7

FEATURES AND BENEFITS:



**(E3)
EARTHMOVER
LOADER**

- Suitable for large scale shovel machinery
- Optimized block design improves traction and handling performance
- Reasonable optimization of grounding area helps abrasion-resistance

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
33.25R29	★★	50KM/H	2060	850	45	27.00/3.5	209	18500kg/500kpa	E3



REM-9

REM-9

FEATURES AND BENEFITS:



**(E4)
HAULAGE**

- Deep tread groove provides good traction.
- High strength special steel wire ensures tyre safety.
- Using special curing technology in order to ensure reliable product quality.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
26.5R25	★★	50KM/H	1782	672	55	22.00/3.0	193	11500kg/450kpa	E4
		10KM/H	1782	672	55	22.00/3.0	209	18500kg/575kpa	E4
29.5R25	★★	50KM/H	1905	750	60	25.00/3.5	200	14000kg/450kpa	E4
		10KM/H	1905	750	60	25.00/3.5	216	22400kg/575kpa	E4
18.00R33	★★	50KM/H	1865	498	53	13.00/2.5	191	10900kg/650kpa	E4
		10KM/H	1865	498	53	13.00/2.5	209	18500kg/800kpa	E4
21.00R33	★★	50KM/H	1964	565	55	15.00/3.0	200	14000kg/650kpa	E4
		10KM/H	1964	565	55	15.00/3.0	218	23600kg/800kpa	E4
24.00R35	★★	50KM/H	2160	652	69	17.00/3.5	209	18500kg/650kpa	E4
		10KM/H	2160	652	69	17.00/3.5	227	30750kg/800kpa	E4



REM-28S

REM-28S

FEATURES AND BENEFITS:



**(E2)
EARTHMOVER
LOADER**

- Excellent traction for snow and ice conditions.
- Wide footprint offers excellent floatation and smooth ride.
- For use on loaders and graders where enhanced winter performance is required.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
385/95R24	★★	50KM/H	1360	396	25	10.00	168	5600kg/700kPa	E2
385/95R25	★★★	70KM/H	1360	396	25	10.00/1.5	170	6340kg/1000kPa	E2
17.5R25	★★	50KM/H	1340	455	27	14.00/1.5	167	5450kg/525kPa	E2
		10KM/H	1340	455	27	14.00/1.5	182	8500kg/650kPa	E2
20.5R25	★★	50KM/H	1484	540	31	17.00/2.0	177	7300kg/525kPa	E2
		10KM/H	1484	540	31	17.00/2.0	193	11500kg/650kPa	E2
23.5R25	★★	50KM/H	1617	600	36	19.50/2.5	185	9250kg/450kPa	E2
		10KM/H	1617	600	36	19.50/2.5	201	14500kg/575kPa	E2



REM-21

REM-21

FEATURES AND BENEFITS:



**(E3/L3)
EARTHMOVER
LOADER**

- New designed tire pattern provides tyre strong traction and handling.
- Enhanced tyre crown and shoulder design improves tyre-resistance against gnaw and puncture.
- Enhanced tyre design provide better tearing-resistance performance and extends service life.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
14.00R24	★★★	50KM/H	1366	375	28	10.00/1.5	169	5800kg/700kPa	E3/L3
	★★★	10KM/H	1366	375	28	10.00/1.5	188	10000kg/950kPa	E3/L3
14.00R25	★★★	50KM/H	1366	375	28	10.00/1.5	169	5800kg/700kPa	E3/L3
	★★★	10KM/H	1366	375	28	10.00/1.5	188	10000kg/950kPa	E3/L3
16.00R25	★★★	10KM/H	1495	435	30	11.25/2.0	197	12850kg/900kPa	L3

Giant Otr Tyres



Driven The World Over®





REM-9

REM-9

FEATURES AND BENEFITS:



(E4)
HAULAGE

- Deep tread groove provides good traction.
- High strength special steel wire ensures tyre safety.
- Using special curing technology in order to ensure reliable product quality.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
27.00R49	★★	50KM/H	2696	750	75	19.50/4.0	223	27250kg/700(TRA)kpa	E4



REM-11

REM-11

FEATURES AND BENEFITS:



(E4)
HAULAGE

- High strength steel wire ensures tyre safety and life under high load operation condition.
- Using special curing technology ensures reliable product quality.
- Special pattern design provides excellent handling and traction performance, extending tyre using life.
- Special tread compound meets the demand of handling performance and improves the abrasion resistance performance.
- The protection of sidewall effectively prevents damage under complex operation condition.

TYRE SIZE	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
33.00R51	★★	50KM/H	3060	890	88	24.00/5.0	223	38750kg/700(TRA)kpa	E4
36.00R51	★★	50KM/H	3240	980	90	26.00/5.0		46250kg/700(TRA)kpa	E4
37.00R57	★★	50KM/H	3425	1040	98	27.00/6.0		53000kg/725(CAS)kpa	E4
40.00R57	★★	50KM/H	3590	1110	98	29.00/6.0		60000kg/725(CAS)kpa	E4

Industrial Tyres



Driven The World Over®





REM-3

REM-3

FEATURES AND BENEFITS:



(SS)
SKID STEER

Specially designed for skid steer loaders

- Reinforced tread and sidewall design provides good anti-puncture performance.
- New pattern design ensures excellent abrasion resistance performance.
- Special tread compound provides good antistatic performance.

TYRE SIZE	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	SPEED SYMBOL
10R16.5	25KM/H	773	264	18.5	8.25	128	1800kg/375kPa	A5
12R16.5	25KM/H	832	315	23	9.75	141	2575kg/375kPa	A5



REM-6

REM-6

FEATURES AND BENEFITS:



(IND)
INDUSTRIAL
LUG

An excellent tyre used on forklifts, terminal tractors and other industrial equipment.

- Flat tread pattern for maximum performance.
- Operations confidence.
- Optimal stability.

TYRE SIZE	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	SPEED SYMBOL
5.00R8	25KM/H	468	137	24.5	3.00D	111	1090kg/1000kPa	A5
6.00R9	25KM/H	540	162	25	4.00E	121	1450kg/1000kPa	A5
6.50R10	25KM/H	585	180	27	5.0	128	1800kg/1000kPa	A5
7.00R12	25KM/H	670	190	28	5.00S	136	2240kg/1000kPa	A5
7.00R15	25KM/H	736	195	28	5.5	143	2725kg/1000kPa	A5
7.50R15	25KM/H	770	215	30	6.0	146	3000kg/1000kPa	A5
8.25R15	25KM/H	838	232	32	6.5	153	3250kg/1000kPa	A5
225/75R15	25KM/H	706	230	25	7.0	149	3650kg/1000kPa	A5
250/70R15	25KM/H	736	252	26.5	7.0	153	3650kg/1000kPa	A5
315/70R15	25KM/H	835	312	36	8.0	165	5150kg/1000kPa	A5
10.00R20	25KM/H	1062	294	35	7.5	166	5300kg/1000kPa	A5
12.00R20	25KM/H	1136	320	41	8.5	176	7100kg/1000kPa	A5
12.00R24	25KM/H	1232	322	39	8.5	178	7500kg/1000kPa	A5
14.00R24	25KM/H	1416	390	64	10.0	193	11500kg/1000kPa	A5
18.00R25	25KM/H	1656	522	63.5	13.00/2.5	207	17500kg/1000kPa	A5



REM-17

REM-17

FEATURES AND BENEFITS:



**AIRCRAFT
TOW
TRACTOR**

Flat, wide tread face provides optimum performance and wear

- Special tread compounds fight rapid wear and scrub
- Exceptional stability with reduced lateral movement in a wide variety of applications including port applications


TYRE SIZE	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	SPEED SYMBOL
16.00R25	25KM/H	1495	424	56	11.25/2.0	200	14000kg/1000kPa	A5



REM-26

REM-26

FEATURES AND BENEFITS:



**(IND)
INDUSTRIAL
LUG**

New designed industrial tyre pattern has excellent adaptability for roads in ports and airports

- Deep tyre pattern and wide tread design extend service life
- The design of the hill reinforcement and anti-stone structure give the tyre more resistance of puncture.
- Tortuous grooves provide greater traction and grip

TYRE SIZE	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	SPEED SYMBOL
315/70R15	25KM/H	828	316	31	8.0	165	5150kg/1000kPa	A5
12.00R20	25KM/H	1122	320	36	8.5	176	7100kg/1000kPa	A5

Earthmover Tyres

TYRE SIZE	PATTERN	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
13.00R24	REM1	★	40	1296	352	30	8.00TG	146	3000kg/375kPa	G2/L2
14.00R24	REM1	★	40	1365	385	30	8.00TG	153	3650kg/375kPa	G2/L2
17.5R25	REM2	★	50	1340	448	27	14.00/1.5	157	4125kg/350kPa	E3/L3
		★	10	1340	448	27	14.00/1.5	176	7100kg/450kPa	E3/L3
17.5R25	REM2	★★	50	1340	448	27	14.00/1.5	167	5450kg/450kPa	E3/L3
		★★	10	1340	448	27	14.00/1.5	182	8500kg/575kPa	E3/L3
20.5R25	REM2	★	50	1480	527	31	17.00/2.0	168	5600kg/350kPa	E3/L3
		★	10	1480	527	31	17.00/2.0	186	9500kg/450kPa	E3/L3
20.5R25	REM2	★★	50	1480	527	31	17.00/2.0	177	7300kg/450kPa	E3/L3
		★★	10	1480	527	31	17.00/2.0	193	11500kg/575kPa	E3/L3
23.5R25	REM2	★	50	1617	600	36	19.50/2.5	176	7100kg/350kPa	E3/L3
		★	10	1617	600	36	9.50/2.5	195	12150kg/450kPa	E3/L3
23.5R25	REM2	★★	50	1617	600	36	19.50/2.5	185	9250kg/450kPa	E3/L3
		★★	10	1617	600	36	9.50/2.5	201	14500kg/575kPa	E3/L3
26.5R25	REM2	★	50	1748	695	37.5	22.00/3.0	184	9000kg/350kPa	E3/L3
		★	10	1748	695	37.5	22.00/3.0	202	15000kg/450kPa	E3/L3
26.5R25	REM2	★★	50	1748	695	37.5	22.00/3.0	193	11500kg/450kPa	E3/L3
		★★	10	1748	695	37.5	22.00/3.0	209	18500kg/575kPa	E3/L3
29.5R25	REM2	★★	50	1860	748	40	25.00/3.5	200	14000kg/450kPa	E3/L3
		★★	10	1860	748	40	25.00/3.5	216	22400kg/575kPa	E3/L3
33.25R29	REM7	★★	50	2060	850	45	27.00/3.5	209	18500kg/500kPa	E3
14.00R24	REM8	★★★★	70	1364	396	25	10.00W	170	6340kg/1000kPa	E2
14.00R25	REM8	★★★★	70	1364	396	25	10.00/1.5	170	6340kg/1000kPa	E2
385/95R25	REM8	★★	80	1364	396	25	10.00/1.5	170	6000kg/900kPa	E2
385/95R25	REM8	/	90	1364	396	25	10.00/1.5	170	6000kg/900kPa	E2
16.00R25	REM8	★★★★	70	1488	432	26	11.25/2.0	177	7400kg/900kPa	E2
16.00R25	REM8	★★	80	1488	432	26	11.25/2.0	174	6700kg/900kPa	E2
20.5R25	REM8	★★	70	1490	540	31	17.00/2.0	179	7757kg/703kPa	E2
14.00R24	REM21	★★★★	50	1366	375	28	10.00/1.5	169	5800kg/700kPa	E3/L3
		★★★★	10	1366	375	28	10.00/1.5	188	10000kg/950kPa	E3/L3
14.00R25	REM21	★★★★	50	1366	375	28	10.00/1.5	169	5800kg/700kPa	E3/L3
		★★★★	10	1366	375	28	10.00/1.5	188	10000kg/950kPa	E3/L3
16.00R25	REM21	★★★★	10	1495	435	30	11.25/2.0	197	12850kg/900kPa	L3
26.5R25	REM9	★★	50	1782	672	55	22.00/3.0	193	11500kg/450kPa	E4
		★★	10	1782	672	55	22.00/3.0	209	18500kg/575kPa	E4
29.5R25	REM9	★★	50	1905	750	60	25.00/3.5	200	14000kg/450kPa	E4
		★★	10	1905	750	60	25.00/3.5	216	22400kg/575kPa	E4
18.00R33	REM9	★★	50	1865	498	53	13.00/2.5	191	10900kg/650kPa	E4
		★★	10	1865	498	53	13.00/2.5	209	18500kg/800kPa	E4
21.00R33	REM9	★★	50	1964	565	55	15.00/3.0	200	14000kg/650kPa	E4
		★★	10	1964	565	55	15.00/3.0	218	23600kg/800kPa	E4
24.00R35	REM9	★★	50	2160	652	69	17.00/3.5	209	18500kg/650kPa	E4
		★★	10	2160	652	69	17.00/3.5	227	30750kg/800kPa	E4
26.5R25	REM10	★★	50	1754	695	40.5	22.00/3.0	193	11500kg/450kPa	E3/L3
		★★	10	1754	695	40.5	22.00/3.0	209	18500kg/575kPa	E3/L3
29.5R25	REM10	★★	50	1868	748	44	25.00/3.5	200	14000kg/450kPa	E3/L3
		★★	10	1868	748	44	25.00/3.5	216	22400kg/575kPa	E3/L3
17.5R25	REM12	★	6	1400	470	66.5	14.00/1.5	174	6600kg/450kPa	L5
		★★	6	1400	470	66.5	14.00/1.5	182	8500kg/575kPa	L5
26.5R25	REM12	★	10	1800	690	92	22.00/3.0	202	15000kg/450kPa	L5
		★★	10	1800	690	92	22.00/3.0	209	18500kg/575kPa	L5
29.5R25	REM12	★	10	1905	775	100	25.00/3.5	208	18000kg/450kPa	L5
		★★	10	1905	775	100	25.00/3.5	216	22400kg/575kPa	L5
17.5R25	REM15	★	10	1340	458	29	14.00/1.5	176	7100kg/450kPa	L2
		★★	10	1340	458	29	14.00/1.5	182	8500kg/575kPa	L2

Earthmover Tyres

TYRE SIZE	PATTERN	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
26.5R25	REM16	★★	10	1800	690	54	22.00/3.0	209	18500kg/575kPa	L4
35/65R33	REM18	★	10	2056	934	98	28.00/3.5	217	23000kg/500kPa	L5
		★★	10	2056	934	98	28.00/3.5	223	27250kg/650kPa	L5
20.5R25	REM19	★	10	1530	536	72	17.00/2.0	186	9500kg/450kPa	L5
		★★	10	1530	536	72	17.00/2.0	193	11500kg/575kPa	L5
23.5R25	REM19	★	10	1662	612	78	19.50/2.5	195	12150kg/450kPa	L5
		★★	10	1662	612	78	19.50/2.5	201	14500kg/575kPa	L5
26.5R25	REM19	★	10	1800	690	92	22.00/3.0	202	15000kg/450kPa	L5
		★★	10	1800	690	92	22.00/3.0	209	18500kg/575kPa	L5
29.5R25	REM19	★	10	1905	775	100	25.00/3.5	208	18000kg/450kPa	L5
		★★	10	1905	775	100	25.00/3.5	216	22400kg/575kPa	L5
385/95R24	REM28S	★★	50	1360	396	25	10.00	168	5600kg/700kPa	E2
385/95R25	REM28S	★★★★	70	1360	396	25	10.00/1.5	170	6340kg/1000kPa	E2
17.5R25	REM28S	★★	50	1340	455	27	14.00/1.5	167	5450kg/525kPa	E2
		★★	10	1340	455	27	14.00/1.5	182	8500kg/650kPa	E2
20.5R25	REM28S	★★	50	1484	540	31	17.00/2.0	177	7300kg/525kPa	E2
		★★	10	1484	540	31	17.00/2.0	193	11500kg/650kPa	E2
23.5R25	REM28S	★★	50	1617	600	36	19.50/2.5	185	9250kg/450kPa	E2
		★★	10	1617	600	36	19.50/2.5	201	14500kg/575kPa	E2

Giant OTR Tyres

TYRE SIZE	PATTERN	LOAD SYMBOL	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	NOTE
27.00R49	REM9	★★	50KM/H	2696	750	75	19.50/4.0	223	27250kg/700(TRA)kPa	E4
33.00R51	REM11	★★	50KM/H	3060	890	88	24.00/5.0	235	38750kg/700(TRA)kPa	E4
36.00R51	REM11	★★	50KM/H	3240	980	90	26.00/5.0	235	46250kg/700(TRA)kPa	E4
37.00R57	REM11	★★	50KM/H	3425	1040	98	27.00/6.0	246	53000kg/725(CAS)kPa	E4
40.00R57	REM11	★★	50KM/H	3590	1110	98	29.00/6.0	250	60000kg/725(CAS)kPa	E4
45/65R45	REM19	★★	10KM/H	2698	1140	116	36.00/4.5	245	51500kg/650(TRA)kPa	L5
40.5/75R39	REM7	★★	50KM/H	2588	998	51	32.00/4.5	225	29000kg/525(TRA)kPa	E3

Industrial Tyres

TYRE SIZE	PATTERN	SPEED	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	LOAD INDEX	SINGLE MAX LOAD PRESSURE	SPEED SYMBOL
10R16.5	REM3	25KM/H	773	264	18.5	8.25	128	1800kg/375kPa	A5
12R16.5	REM3	25KM/H	832	315	23	9.75	141	2575kg/375kPa	A5
5.00R8	REM6	25KM/H	468	137	24.5	3.00D	111	1090kg/1000kPa	A5
6.00R9	REM6	25KM/H	540	162	25	4.00E	121	1450kg/1000kPa	A5
6.50R10	REM6	25KM/H	585	180	27	5.0	128	1800kg/1000kPa	A5
7.00R12	REM6	25KM/H	670	190	28	5.00S	136	2240kg/1000kPa	A5
7.00R15	REM6	25KM/H	736	195	28	5.5	143	2725kg/1000kPa	A5
7.50R15	REM6	25KM/H	770	215	30	6.0	146	3000kg/1000kPa	A5
8.25R15	REM6	25KM/H	838	232	32	6.5	153	3250kg/1000kPa	A5
225/75R15	REM6	25KM/H	706	230	25	7.0	149	3650kg/1000kPa	A5
250/70R15	REM6	25KM/H	736	252	26.5	7.0	153	3650kg/1000kPa	A5
315/70R15	REM6	25KM/H	835	312	36	8.0	165	5150kg/1000kPa	A5
10.00R20	REM6	25KM/H	1062	294	35	7.5	166	5300kg/1000kPa	A5
12.00R20	REM6	25KM/H	1136	320	41	8.5	176	7100kg/1000kPa	A5
12.00R24	REM6	25KM/H	1232	322	39	8.5	178	7500kg/1000kPa	A5
14.00R24	REM6	25KM/H	1416	390	64	10.0	193	11500kg/1000kPa	A5
18.00R25	REM6	25KM/H	1656	522	63.5	13.00/2.5	207	17500kg/1000kPa	A5
16.00R25	REM17	25KM/H	1495	424	56	11.25/2.0	200	14000kg/1000kPa	A5
315/70R15	REM26	25KM/H	828	316	31	8.0	165	5150kg/1000kPa	A5
12.00R20	REM26	25KM/H	1122	320	36	8.5	176	7100kg/1000kPa	A5



Devoted to becoming one of the most professional suppliers of tyre products and services.



Company Address: No. 290 Wusong Road, Shanghai, China
Post Code: 200080

Website: <http://www.doublecoinholdings.com/en>